

LTL

Photopolymer Plates

The Perfect Solution For Corrugated Printing

MacDermid LTL liquid photopolymer is a 32 durometer (Shore A) resin designed specifically to provide thick photopolymer printing plates for the corrugated market.

Our **LTL** resin offers tack-free properties for excellent solids coverage, high resilience for lint-free printing, and easy cleanup on press, saving precious time and money. MacDermid LTL photopolymer is dyed red to improve the contrast so that mounting is easier.


For corrugated printing that needs to be handled just right, count on the company that says "Yes We Can," MacDermid.

Key Features

- **Extremely low tack plate gives clean running on press**
- **Excellent durability with UV, heat and humidity stability**
- **Wide imaging latitude easily images a variety of copy, including fine detail**
- **Highly resilient plate with exceptional ink transfer**
- **Ability to cap for reduced fluting**

Segments

Corrugated 

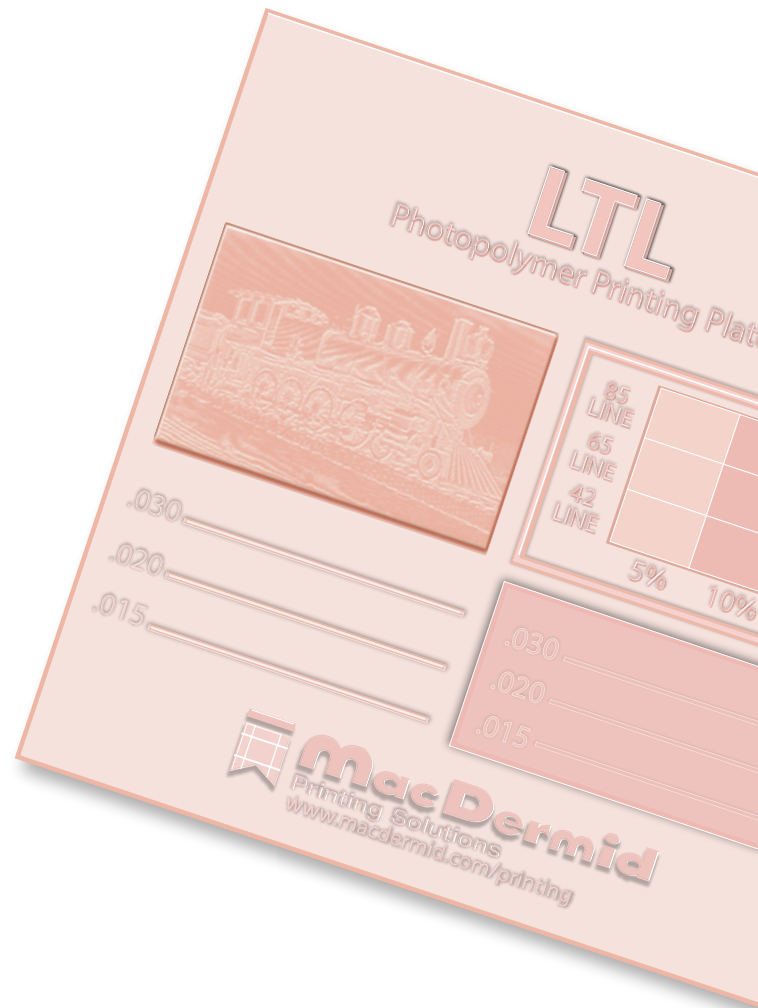

YES WE CAN

 **MacDermid**
Printing Solutions



Photopolymer Plates

Technical Specifications

LTL is packaged in 5-gallon (40 lbs., 18 kg., net wt.) plastic containers. It is also available in 2200 lbs. (1000 kg.) totes.

Performance Specifications

Plate thickness	0.112 - 0.280 in.
Background thickness	0.070 - 0.180 in.
Relief height	0.032 - 0.125 in.
Tone range reproduction*	2-95%
Line screen, max*	100 lpi

*When used as a capped plate

Plate Processing

Hardness (Shore A)	32
Viscosity, 25°C	32,000 cps
Appearance	Red
Cloud point	<32°F (0°C)
Freezing point	<32°F (0°C)
Temp. to thaw	68°F (20°C)

Applications

LTL plates are designed for high-quality thick plate applications for direct printing on corrugated.

YES WE CAN

It takes more than innovative, high performance products and superior technical service to help our customers compete and win in today's global marketplace. It takes a total commitment to understanding their needs and the ability to provide the right solution—every time.

When success is your only goal, trust the company that says "Yes We Can."

Processing

LTL plates are processed the same as other MacDermid liquid photopolymer printing plates, but require an additional light-finishing step in order to ensure tack-free properties. After the LTL plate has finished a ten minute post exposure step, it is placed into a dryer for 20-25 minutes at a temperature of 100-110°F (38-42°C).

The plate must be completely dry and warm when placed into the light-finishing unit, and must remain warm during the entire light-finishing step. The plate is exposed in the light-finishing unit (MacDermid Germicidal Unit) for 18-22 minutes at 100°F-110°F (38°C-42°C).

The MacDermid light-finishing unit is pre-heated to ensure that plates remain warm and proper detacking occurs during exposure. When using other plate finishers, exhaust from the unit should be minimized to maintain the plate temperature, and longer processing times may be needed.¹ This will aid in providing the best tack-free plate surface. Please consult with your MacDermid Technical Representative for appropriate procedures. Light-finishing units should be turned on 20 minutes prior to use each day to ensure the unit is warmed up. If the plate surface clouds or crazes after light-finishing, it may indicate that the plate has been exposed for too long. Reduce the amount of time in the light-finishing step. After completion of light-finishing, LTL plates are ready for the press.

¹ Exhaust control may not be possible on non-MacDermid light-finishers. Check with the equipment manufacture. For customers using a MacDermid sheet photopolymer detack unit, the warm plate should be detacked for 35-45 minutes (bulb intensity should be > 600mj)



For more information, please contact us at:

USA: Global Headquarters
5210 Phillip Lee Drive
Atlanta, GA 30336
Phone: 404.696.4564

www.macdermid.com/printing